

Interior Glazed Exchange Window

- **Narrow Inset Frame Vision Window with Surround Sound System to Allow Natural Voice Transmission**


Narrow Inset Frame Vision Windows with Surround Sound allow natural voice transmission without an installed speak-thru device. Frame is designed for walls at least 4" thick. They are not weathertight, and are recommended for installation only in interior applications. The frame is uniform on four sides. Securing the frame to the wall requires the removal and installation of the glazing material and spacer blocks. Vision Windows are typically installed above built in Exchange Drawers, or as sidelites in Multi-Lite Exchange Window units. Common sizes are shown below, alternate sizes are available.

SERIES: N1V1A, N1V1DU, N1V1P

OVERALL SIZE (W x H)	WALL OPENING SIZE (W x H)
24" x 36"	24-1/2" x 36-1/4"
30" x 36"	30-1/2" x 36-1/4"
30" x 42"	30-1/2" x 42-1/4"
36" x 36"	36-1/2" x 36-1/4"
36" x 42"	36-1/2" x 42-1/4"



Rubber Spacers
Allow Sound Around
Glazing Material

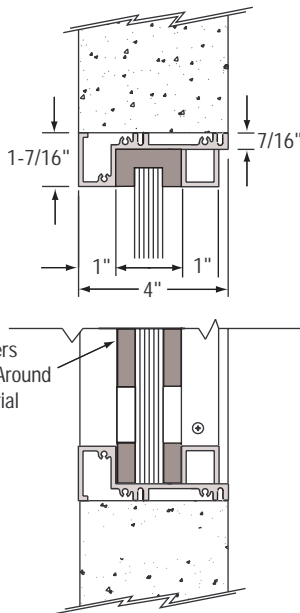

SPECIFICATIONS:

Materials: Frame - .125" Thick Extruded 6063-T5 Aluminum Alloy;
Glazing - 1/4" Glass; 1-5/16" Level 1 Glass; 1-1/4" Level 1 Acrylic;
3/4" Level 1 Lexgard; 1-1/4" Level 3 Lexgard

Finishes: Frame - Satin Anodized, Duranodic Bronze, RAL Powder
Paint Colors or Custom Kynar Paint Colors

Instructions Included

