
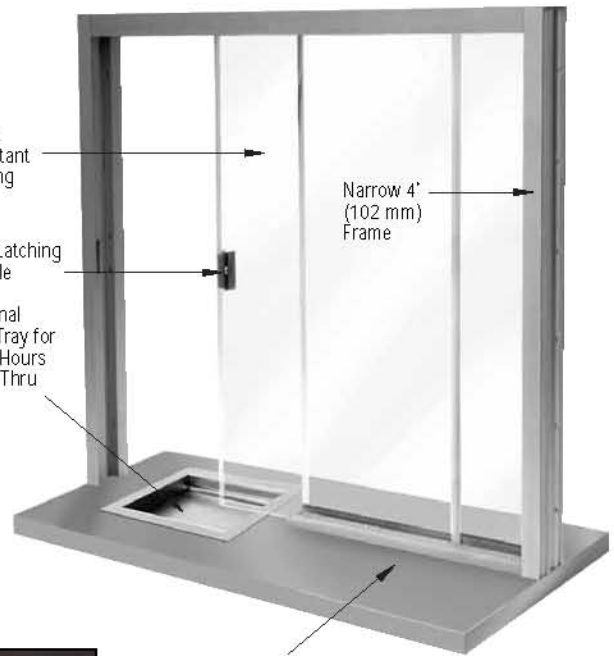


BULLET RESISTANT WINDOWS

Bullet Resistant Sliding Windows Interior Windows

- Each Window is Custom Fabricated to Fit the Opening
- Features Include Easy Rolling Overhead Ball Bearing Carrier and Self-Latching Handle
- Can Be Used "Business as Usual" During Daytime, Closed at Night for Protection
- Available in Level 1 or Level 3 Bullet Resistance

PROTECTION LEVELS



Amoco Convenience Store, Atlanta, GA. Installation by Binswanger Glass, Smyrna, GA



The clerk at this convenience store opens the Bullet Resistant Sliding Window for "business as usual" during the day. At night, the clerk closes the window for maximum protection.

SPECIFICATIONS:

Material: .125" (3 mm) Thick Extruded 6063-T5 Aluminum Alloy


Finishes: Satin Anodized, Duranodic Bronze, RAL Powder Painted Colors or Custom Kynar Painted Colors

Glazing: 1-1/4" (32 mm) Level 1 Acrylic; 1-1/4" (32 mm) Level 3 Lexgard

Options: Laminated or Stainless Steel Counter, Deal Tray; Speak-Thru; Keyed Lock; Burglar Bar

Configurations*: 0X or X0

* Determined from Clerk's Side: X = Sliding Panel; 0 = Fixed Panel

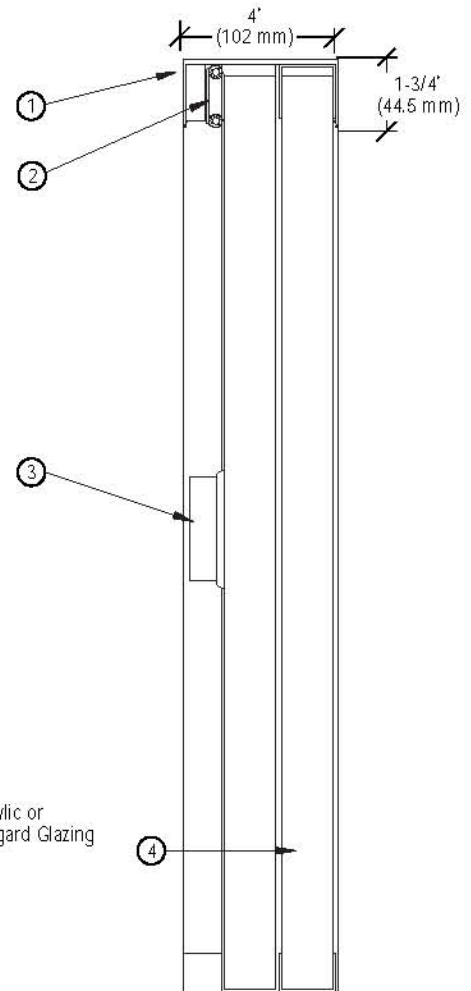

CAT. NO.	PROTECTION LEVEL	FINISH
SBRWA1	1	Satin Anodized
SBRWU1	1	Duranodic Bronze
SBRWP1	1	Painted, Customer to Specify
SBRWA3	3	Satin Anodized
SBRWU3	3	Duranodic Bronze
SBRWP3	3	Painted, Customer to Specify

- ① Narrow Header
- ② Heavy-Duty Anti-Lift Ball Bearing Carrier
- ③ Self-Latching Handle
- ④ 1-1/4" (32 mm) Level 1 Acrylic or 1-1/4" (32 mm) Level 3 Lexgard Glazing